


Pearl-5 SK Specifications

Izzi Bath and Spa

19250 US Hwy 27

Clermont Florida 34715

800-214-7440 www.izzibath.com

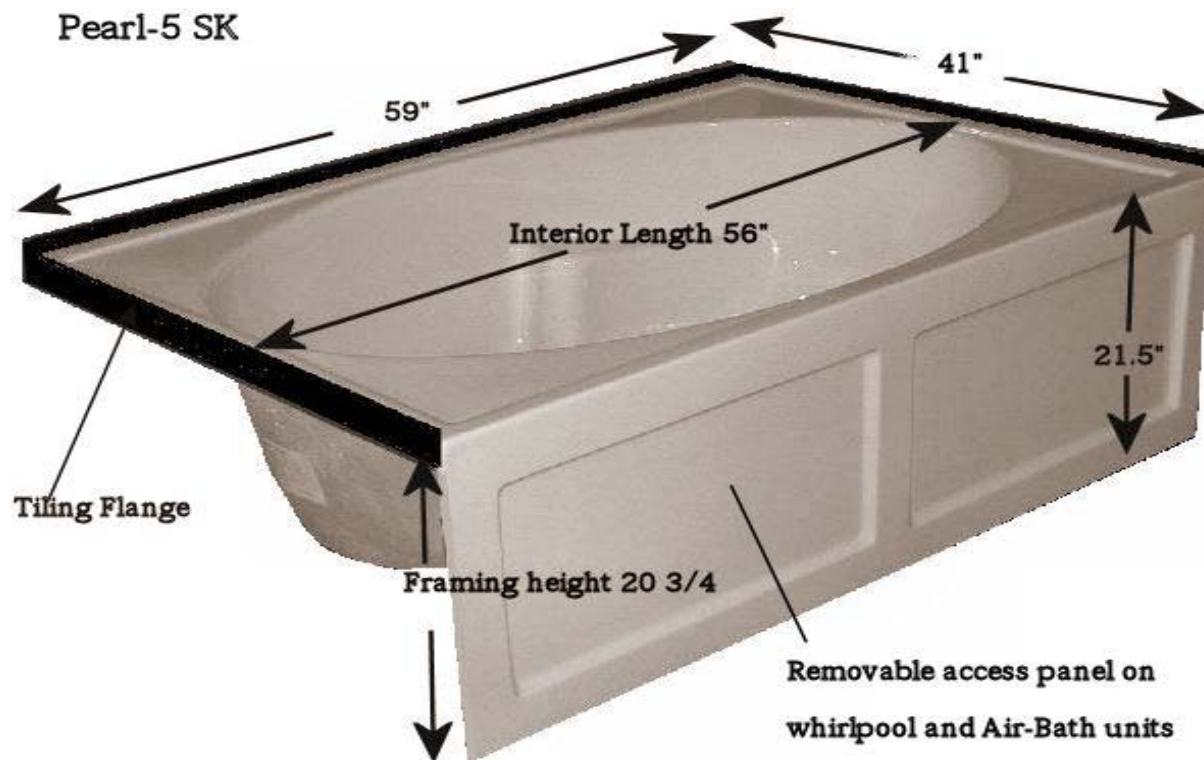

Additional information:

All skirted baths must be supported under the left, right and back tiling flange by Framing a 2 X 4 ledger board. The top of the ledger board will be at the framing height of 20 3/4 inches from the floor. The tiling flange should not be screwed to the framing or studs. It is not intended for support of the bath, but to prevent water leakage only. The bottom of the bath should be shimmed in order to transfer the bath weight to the floor.

* Whirlpool and air-Bath units will have one removable access panel on the left front.

* Waste overflow height 15 inches